



The purpose of temporary earthing (grounding) equipment is to shield employees from electric shock caused by high voltage. It can be used to ground temporarily short-circuited lines or power-failing equipment, preventing unexpected electricity from entering and harming people and equipment.

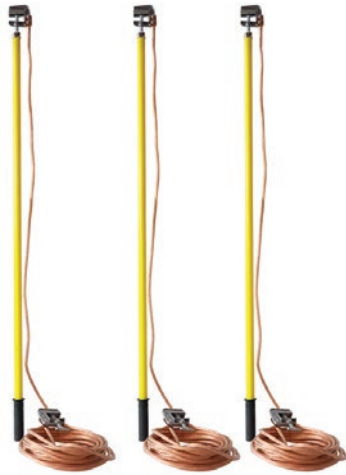


Single Phase Model




Ordering Info.: SP-10..... Portable Earthing Equipment

Parameters	SP-04	SP-10	SP-35	SP-110	SP-220	SP-330	SP-550
Voltage	0.4kV	10kV	35kV	110kV	220kV	330kV	550kV
Cable Size	16mm ²	25mm ²	35mm ²	35mm ²	50mm ²	70mm ²	95mm ²
Cable Length	5m x 3pcs	10m x 3pcs	12m x 3pcs	15m x 3pcs	18m x 3pcs	18m x 3pcs	18m x 3pcs
Stick Length	0.5m	1m	1.5m	2m	3m	5m	6m
Number of Stick	3pcs/set	3pcs/set	3pcs/set	3pcs/set	3pcs/set	3pcs/set	3pcs/set

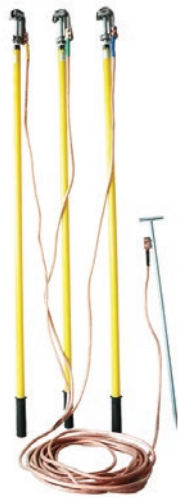

Combination Model

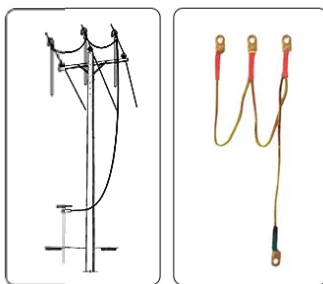

Ordering Info.: PE-04..... Portable Earthing Equipment

Parameters	PE-04	PE-10	PE-35	PE - 110	PE - 220
Voltage	0.4kV	10kV	35kV	110kV	220kV
Cable Size	16mm ²	25mm ²	35mm ²	35mm ²	50mm ²
Cable Length	3 x 1.5m + 8m	3 x 1.5m + 10m	3 x 1.5m + 10m	3 x 2m + 12m	3 x 2m + 15m
Stick Length	0.5m	1m	1.5m	2m	3m
Number of Stick	3pcs/set	3pcs/set	3pcs/set	3pcs/set	3pcs/set

Package Includes

- Earthing Stick
- Earthing Clamp
- Flexible Copper Wire
- Standard Carrying Bag

Features

- Fiberglass Rod: Made of epoxy reinforced fiberglass with mechanical strength, light weight and best insulation.
- Flexible Copper Wire: High purity, fine tissue, low oxygen content, good conductivity, corrosive & weather resistance.

- Electric Clamp: Multiple sizes and styles are optional, can meet the earthing (grounding) requirements under various working conditions.

